

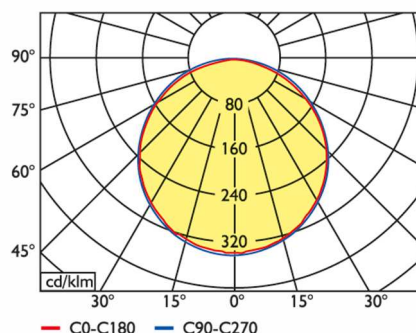


Datenblatt LED Einbau-Downlight – EDS

Data-Sheet LED recessed-downlight – EDS

- sehr flaches Einbau-Downlight mit 21 mm Einbauhöhe*¹
 - Leuchtengehäuse aus Aluminium, weiß pulverbeschichtet
 - sichtbarer Deckenring aus Aluminium, weiß pulverbeschichtet (RAL 9003)
 - opale Abdeckung, bündig integriert in Deckenring
 - separater, zertifizierter (ENEC) Markentreiber
 - Abstrahlwinkel 110°
 - IP20, IP40*/IP44** raumseitig (typenabhängig)
 - Einbau in Gipskarton- und Moduldecken mittels Schnellspannfedern
 - LED: CRI > 80, 3.000 K, Lebensdauer > 50.000 h (L70B50), SDCM < 5 (initial), Risikogruppe (EN 62471): 0
 - optional
 - DALI-DIM
 - CASAMBI
 - 4.000 K
-
- very slim recessed-downlight with 21 mm installation height*¹
 - housing made of aluminium, white powder-coated (RAL 9003)
 - white aluminium ring, powder-coated
 - opal cover, flush integrated in ceiling ring
 - separate, certified (ENEC) brand driver
 - beam angle 110°
 - IP20, IP40*/IP44** room-sided (depending on type)
 - installation into plaster-cardboard and modular ceilings by means of tension springs
 - LED: CRI > 80, 3.000 K, lifetime > 50.000 h (L70B50), SDCM < 5 (initial), risk group (EN 62471): 0
 - optional
 - DALI-DIM
 - CASAMBI
 - 4.000 K

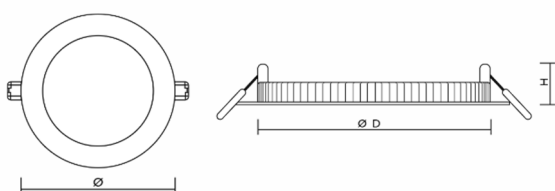

EEK E nur gültig für Typ EDS 300.25.3
EEK E only valid for type EDS 300.25.3

Art.-Nr. Art.-No.	Typ Type	P _{sys.} [W]	P _{on} [W]	Nutzlichtstrom Useful luminous flux	CCT [K] CCT [K]	Ø [mm]	H [mm]	ØDA [mm]	EEK
LDL100050*	EDS 150.9.3	10	6,8	790 lm	3.000	150	21	135	F
LDL100051*	EDS 170.12.3	12,5	10,2	1.150 lm	3.000	175	21	158	F
LDL100052IP**	EDS 195.15.3	15,5	13,0	1.390 lm	3.000	195	21	180	F
LDL100053IP**	EDS 225.20.3	21	17,0	1.870 lm	3.000	225	21	206	F
LDL100054IP**	EDS 240.22.3	22	17,7	1.940 lm	3.000	240	21	225	F
LDL100060IP**	EDS 300.25.3	25	20,8	2.500 lm	3.000	300	21	280	E

Abweichungen der optischen und elektrischen Daten sind in der Norm mit geltenden Standards zugelassen und berechtigen zu keiner Reklamation. Technische und maßliche Änderungen vorbehalten.
Deviations in optical and electrical data are permitted in the standard with applicable standards and do not entitle to any complaint. Subject to technical and dimensional changes.

*1 - Max. 30.000 Schaltzyklen / Switching cycles

EEK = Energieeffizienzklasse / energy efficiency class

ØDA = Deckenausschnitt / ceiling section

P_{sys.} = Systemleistung / system power

P_{on} = Leistung Lichtquelle / power light source

CE IP20/IP40*/IP44** / SK II / 220-240 V / 50/60 Hz

*raumseitig/room-sided
**raumseitig/room-sided