

Data Sheet Undersill Trunkings BR 70

Tested and certificated according to: DIN EN 50085-1 and DIN EN 50085-2-1

Stand: 08.2022




The undersill trunkings of type BR-70 are made of rigid PVC by extrusion.

Characteristic:

Material:	rigid-PVC; lead-, silicon- und cadmium-free (RoHS conform)	
Operation temperature:	static: -20°C... +60°C (permanently)	
working temperature:	>0°C	
fire behaviour:	hard to inflame according to	DIN 4102-1 - Level B1
	Self-extinguishing according to	UL94 - V0
	Fire load:	5,2kW/kg
Dielectric strength:	>30kV/mm	
UV resistance:	Hard PVC is conditionally UV-resistant to a certain extent, (colour changes due to UV- exposure cannot be ruled out)	
Colour:	RAL 9001 cream white RAL 9010 pure white RAL 9016 traffic white	
Delivery length:	2000 mm with cover and protective film (Optional: cable retention clamp)	

Special features:

- Visible surfaces covered with protective film
- With perforated base at 125 mm intervals to be fixed to a solid structure or partially self-supporting for fastening to consoles.
- Two T-rails on the floor to accommodate dividers or built-in equipment
- Designed for front mounted panel boxes and equipment racks
- Connectors for mechanical connection must be ordered separately
- Accessories and further information can be found at www.licatec.de

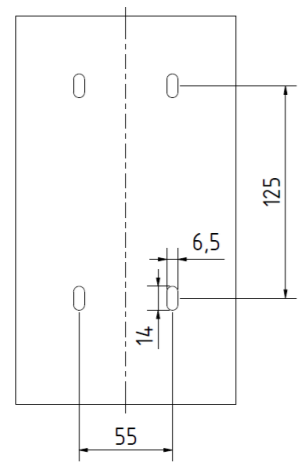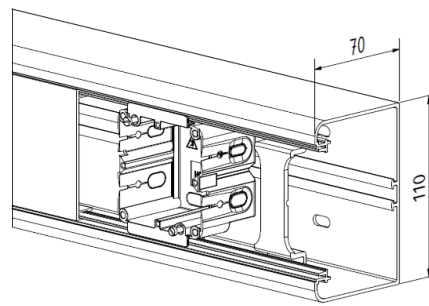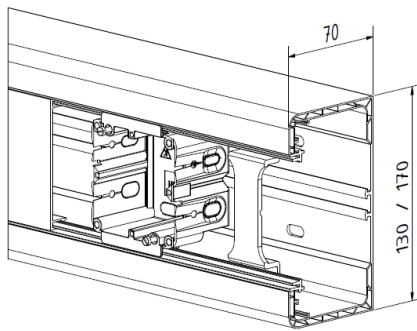

Undersill Trunkings BR 70

	Width [mm]	height [mm]	colour	Art-No.		
BR PVC	110	70	RAL 9010	8605-1		
	110		RAL 9016	8603-1		
	130		RAL 9001	8200		
	130		RAL 9010	8205		
	130		RAL 9016	8203		
	170		RAL 9001	8500		
	170		RAL 9010	8505		
	170		RAL 9016	8503		
	cable retention clamp				8180	



RoHS
konform

