

Datenblatt Gitterbahn GBL 35

Data-Sheet Mesh Cable Trays GBL 35

Standard (L.V)

- Werkstoff: Stahl-Draht
- Drahtstärke $\varnothing 4,5$ längs + $\varnothing 3,5$ quer
- Einzeldraht oben
- Sendzimier verzinkt

Optional


- Tauchfeuerverzinkt (nach EN ISO 1461)
- Drahtstärke $\varnothing 5,5$ längs + $\varnothing 4,5$ quer (.V)

Standard (L.V)

- Material: steel wire
- Wire size: $\varnothing 4,5$ longitudinal + $\varnothing 3,5$ cross
- upside single wire
- Sendzimier galvanized

Optional

- Hot-dip galvanized (according to ISO EN 1461)
- Wire size: $\varnothing 5,5$ longitudinal + $\varnothing 4,5$ cross

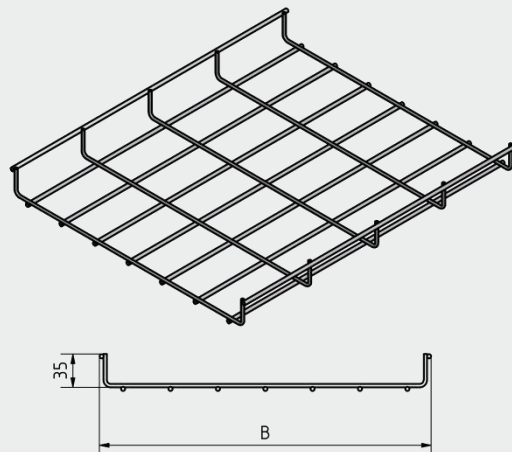

Typ type	Maschenweite Mesh opening [mm]	Abmessung Dimension			Art.-Nr. Art.-No.	Gewicht Weight [kg/m]
		H [mm]	B [mm]	Länge / length [mm]		
30 x 065	100 x 50	30	65	3000	803008L.V	0,59
35 x 100	100 x 50	35	96	3000	803010L.V	0,62
35 x 150	100 x 50	35	146	3000	803011L.V	0,92
35 x 200	100 x 50	35	196	3000	803012L.V	0,96
35 x 250	100 x 50	35	246	3000	803013(L.V / .V)	1,13 / 1,53
35 x 350	100 x 50	35	346	3000	803014(L.V / .V)	1,46 / 1,92
35 x 450	100 x 50	35	446	3000	803015.V	2,30
35 x 550	100 x 50	35	546	3000	803016.V	3,81