




Datenblatt LED Anbau-Wannenleuchte, rund – FMRL

Data-Sheet LED surface-mounted luminaire, round – FMRL



Stand: 02.2020

- Grundkörper aus Stahlblech, weiß pulverbeschichtet (RAL 9003)
 - Wanne sphärisch, opal aus PMMA, sicher gehalten durch integrierte Drehverschlüsse
 - anschlussfertig verdrahtet mit zertifiziertem (ENEC) Markentreiber und LED-Stripes
 - LED: 4.000 K, CRI > 80, 80.000 h (L80), SDCM 3 (initial)
 - optional:
 - DALI-DIM
 - CASAMBI
 - 3.000 K, 5.700 K, TUNABLE-WHITE
 - integrierter Bewegungsmelder
 - Notlichteinbausatz (FMRL-375 / -480)
-
- base plate made of sheet-steel, white powder-coated (RAL 9003)
 - spherical diffuser, opal made out of PMMA, safely held by means of integrated turn-lock fasteners
 - ready for connection with certified (ENEC) brand driver and LED-stripes
 - LED: 4.000 K, CRI > 80, 80.000 h (L80B50), SDCM 3 (initial)
 - optional:
 - DALI-DIM
 - CASAMBI
 - 3.000 K, 5.700 K, TUNABLE-WHITE
 - integrated motion detector
 - emergency pack (FMRL-375 / -480)

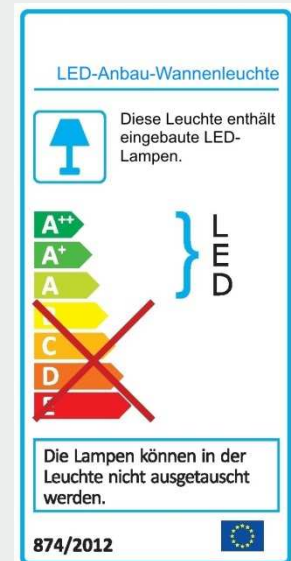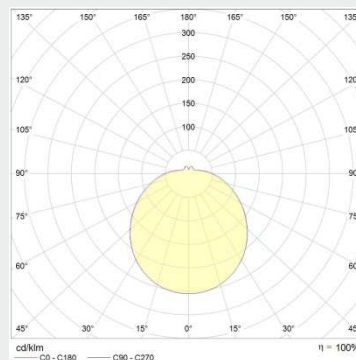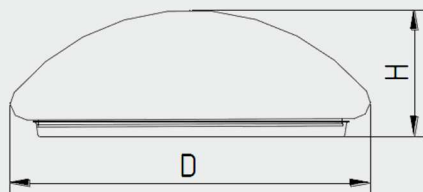

Typ Type	Watt Watt	Lichtstrom Luminous flux	lm/W lm/W	Farbtemp. [K] Colour temp. [K]	D [mm]	H [mm]	Gewicht [kg] Weight [kg]
FMRL-285.9.4	9	900 lm	100	4.000	285	89	1,0
FMRL-285.14.4	14	1.400 lm	100	4.000	285	89	1,0
FMRL-375.27.4	27	2.700 lm	100	4.000	375	108	1,6
FMRL-480.34.4	34	3.600 lm	106	4.000	480	132	2,3
FMRL-480.44.4	44	4.600 lm	105	4.000	480	132	2,3

Abweichungen der optischen und elektrischen Daten sind in der Norm mit geltenden Standards zugelassen und berechtigen zu keiner Reklamation. Technische und maßliche Änderungen vorbehalten.

CE IP44 / 220-240 V / 50/60 Hz