
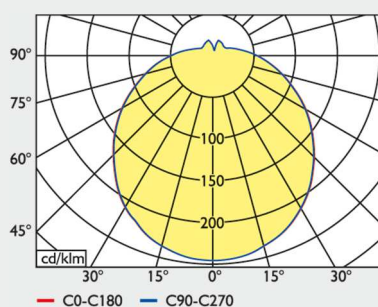


Datenblatt LED Anbau-Wannenleuchte, rund – FMRL

Data-Sheet LED surface-mounted luminaire, round – FMRL

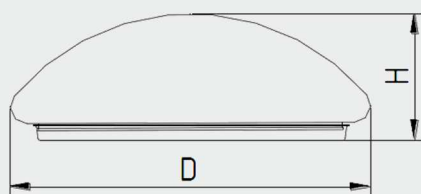

Stand: 08.2021

- Grundkörper aus Stahlblech, weiß pulverbeschichtet (RAL 9003)
 - Wanne sphärisch, opal aus PMMA, sicher gehalten durch integrierte Drehverschlüsse
 - anschlussfertig verdrahtet mit zertifiziertem (ENEC) Markentreiber und LED-Stripes
 - LED: 4.000 K, CRI > 80, 80.000 h (L80), SDCM 3 (initial), RG 0
 - optional:
 - DALI-DIM
 - CASAMBI
 - 3.000 K, 5.700 K, TUNABLE-WHITE
 - integrierter Bewegungsmelder
 - Notlichteinbausatz (FMRL-375 / -480)
-
- base plate made of sheet-steel, white powder-coated (RAL 9003)
 - spherical diffuser, opal made out of PMMA, safely held by means of integrated turn-lock fasteners
 - ready for connection with certified (ENEC) brand driver and LED-stripes
 - LED: 4.000 K, CRI > 80, 80.000 h (L80), SDCM 3 (initial), RG 0
 - optional:
 - DALI-DIM
 - CASAMBI
 - 3.000 K, 5.700 K, TUNABLE-WHITE
 - integrated motion detector
 - emergency pack (FMRL-375 / -480)



Art.-Nr.	Typ	Watt	Lichtstrom	lm/W	Farbtemp.	D	H	[kg]
Art.-No.	Type	Watt	Luminous flux	lm/W	Colour temp.	[mm]	[mm]	[kg]
405554	FMRL-285.14.3	14	1.340 lm	96	3.000 K	285	89	1,0
405556	FMRL-375.27.3	27	2.590 lm	96	3.000 K	375	108	1,6
405555	FMRL-480.34.3	34	3.450 lm	101	3.000 K	480	132	2,3
405558	FMRL-480.44.3	44	4.410 lm	100	3.000 K	480	132	2,3
405550	FMRL-285.14.4	14	1.400 lm	100	4.000 K	285	89	1,0
405551	FMRL-375.27.4	27	2.700 lm	100	4.000 K	375	108	1,6
405552	FMRL-480.34.4	34	3.600 lm	106	4.000 K	480	132	2,3
405559	FMRL-480.44.4	44	4.600 lm	105	4.000 K	480	132	2,3

Abweichungen der optischen und elektrischen Daten sind in der Norm mit geltenden Standards zugelassen und berechtigen zu keiner Reklamation. Technische und maßliche Änderungen vorbehalten.



 IP44 / 220-240 V / 50/60 Hz