
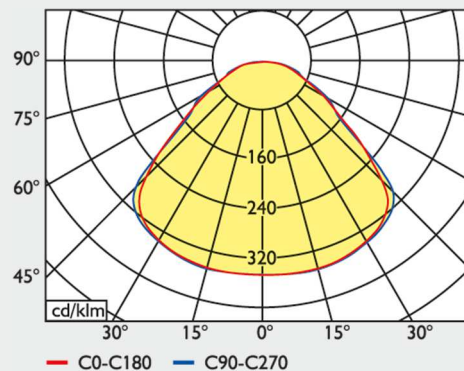


## Datenblatt LED Anbauleuchte, rund – MRAB

### Data-Sheet LED surface mounted luminaire, round – MRAB


Stand: 08.2021

- rundes Leuchtengehäuse aus Stahlblech, weiß pulverbeschichtet (RAL 9003)
  - anschlussfertig verdrahtet mit hochwertiger LED-Platine und zertifiziertem (ENEC) Markentreiber
  - transluzente Abdeckung (PMMA) mit Mikro-Prismenstruktur, bündig integriert
  - LED: 4.000 K, CRI > 80, 80.000 h (L80), SDCM 3 (initial)
  - optional:
    - opale Abdeckung
    - DALI-DIM
    - 3.000 K
    - CRI 90
- round luminaire housing made of steel sheet, white powder painted (RAL 9003)
  - wired ready for connection with high quality LED-board and certified (ENEC) brand driver
  - translucent acrylic cover with microprismatic layer, flush integrated
  - LED: 4.000 K, CRI > 80, 80.000 h (L80), SDCM 3 (initial)
  - optional:
    - opal cover
    - DALI-DIM
    - 3.000 K
    - CRI 90

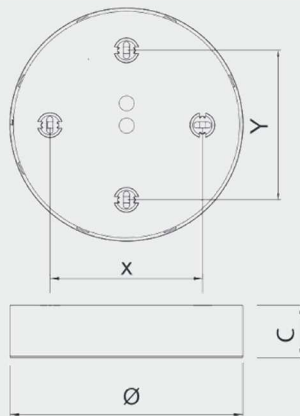

Art.-Nr.	Typ	Watt	Farbtemp.	Lichtstrom	lm/W	Ø	C	X	Y	[kg]
Art.-No.	Type	Watt	Colour temp.	Luminous flux	lm/W	[mm]	[mm]	[mm]	[mm]	[kg]
3381000	MRAB 14.4	14	4.000 K	1.100 lm	79	184	41	120	140	0,9
3381002	MRAB 22.4	22	4.000 K	1.800 lm	82	184	41	120	140	0,9
3381001	MRAB 28.4	28	4.000 K	2.600 lm	93	365	45	200	230	2,0
3381003	MRAB 36.4	36	4.000 K	3.200 lm	89	365	45	200	230	2,0
3381004	MRAB 34.4	34	4.000 K	3.400 lm	100	548	45	400	400	3,0
3381005	MRAB 40.4	40	4.000 K	3.900 lm	98	548	45	400	400	3,0

Abweichungen der optischen und elektrischen Daten sind in der Norm mit geltenden Standards zugelassen und berechtigen zu keiner Reklamation. Technische und maßliche Änderungen vorbehalten.

CE  IP20 / 220-240 V / 50/60 Hz