

Data Sheet Installation Trunkings CK


Tested and certificated according to: DIN EN 50085-1 and DIN EN 50085-2-1

Stand: 05.2022

The installation trunkings of type CK are made of rigid PVC by extrusion.

Characteristic:

Material:	rigid-PVC; lead-, silicon- und cadmium-free (RoHS conform)		
Operation temperature:	static:	-20°C... +60°C	
	dynamic:	-5°C... +60°C	
working temperature:	>0°C		
fire behaviour:	hard to inflame according to	DIN 4102-1	Level B1
	self-extinguishing according to	UL94	V0
	Fire load:		5,2kW/kg
Dielectric strength:	>30kV/mm		
UV resistance:	Hard PVC is conditionally UV-resistant to a certain extent, (colour changes due to UV- exposure cannot be ruled out)		
Colour:	RAL 9001 cream white RAL 9010 pure white RAL 9016 traffic white RAL 7035 light grey RAL 7016 anthracite grey RAL 8014 sepia brown		
Delivery length:	2000 mm with cover		

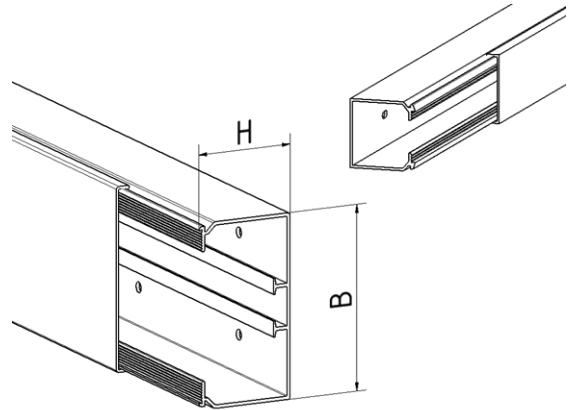

Special features:

- CK trunkings are equipped with cable clamps from 60x40 mm and floor profiles to accommodate dividers from 60x60 mm.
- For CK trunkings from 60x40 mm, molded parts are available for the following purposes Part with flexible opening angle available.
- Bottom perforations at a distance of 125 mm for fixing to fixed structure.
- Accessories and further information can be found at www.licatec.de

CK	Height (H)	IK-class	Available width (B)						
			20*	30*	40*	60*	90*	110*	130*
	10	IK 06	20*						
	15	IK 06	15*	30*					
	18	IK 06	18*						
	25	IK 08	40*						
	30	IK 08	30*						
	40	IK 08	40*	60*	100				
	60	IK 08	60*	90*	110*	130*	150*	190*	230*

*...VDE certified



CE RoHS
konform