


Data sheet retaining clamp

stand: 08.2022

The retaining clip is injection molded from polypropylene.

Material:	Polypropylene (halogen-free, UL listed E86615, RoHS)
Operating temperature:	-20 °C ... +80 °C
Working temperature:	>0 °C
Fire behavior:	self-extinguishing according to ISO 3795 Fire classification according to UL94 V0 Glow wire test 960 °C according to IEC 60695-2-12 Glow wire test 625 °C according to IEC 60695-2-13 Oxygen index 26 % according to ISO 4589-2
Dielectric strength:	>30 kV/mm
UV resistance:	Polypropylene is conditionally UV-resistant, color changes under UV-exposure cannot be ruled out
Color:	RAL 7030 grey
Special features:	- applicable in all wiring ducts (manufacturer-neutral) from a width of 37,5 mm and a height of 50 mm - Adhesive tape for fixation in the trunking

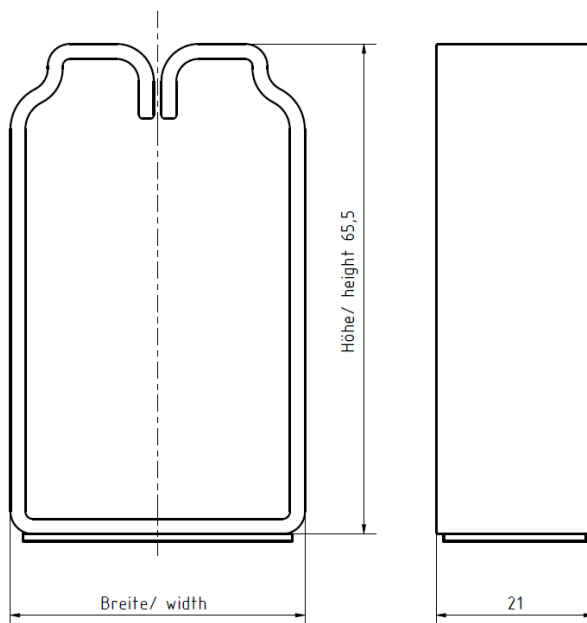

Item number	Basic size	width [mm]	height [mm]
7835	75 x 50	64,9	40,5
7837	37,5 x 75	27,4	65,5
7838	50 x 75	39,4	65,5
7839	75 x 75	64,9	65,5



RoHS
konform

Retaining clamp