

## Data Sheet Flexible Wiring Ducts halogen-free

Stand: 06.2022


The flexible wiring duct is manufactured with injection moulding method and is made of flame-protected polypropylene.

### Properties:

Material:	PP blend, free of halogen, silicon and cadmium		
Operation temperature:	static:	-20°C... +80°C	
	dynamic:	0°C... +50°C	
Processing temperature:	>0°C		
Fire behaviour:	self-extinguishing	UL94	V0
Halogen free	yes		
Dielectric strength:	>30kV/ mm		
UV-resistance:	PP is partly UV-resistant, colour changes in case of UV-exposure cannot be excluded		
Colour:	similar RAL 7030 grey similar RAL 9010 white		
Delivery lengths:	500 mm		

### Specific Features:

- self-adhesive tape as retaining aid on the bottom (DuploCOLL 5003 LSE)

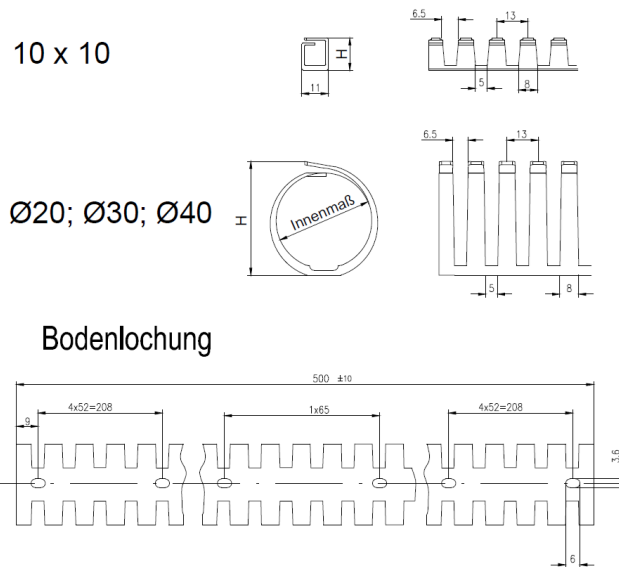

Nominal Size	Height (H)	interior Dimension	Art.-No.	
			(with self-adhesive tape) grey / white	(without self-adhesive tape) grey / white
<b>10x10</b>	13,5	9,5x9,5	7860-1   7864-1	-   7864-1OK
<b>20</b>	24	Ø 20	7861-1   7865-1	7861-1OK   7865-1OK
<b>30</b>	36	Ø 30	7862-1   7866-1	7862-1OK   7866-1OK
<b>40</b>	48	Ø 40	7863-1   7867-1	7863-1OK   7867-1OK

**CE** **RoHS**  
konform

Flexible Wiring Ducts halogen-free